

Features

Analogue telephone matching with most PABX, PBX and PAX system
 Robust body vandal resistant
 Busy tone detection for auto release the line if line busy
 Dry contact for external control automation
 Auto answer
 Full Soft lock: only dial out from phone book 50 memory address number
 Half soft lock: limit to dial out starting number, e.g. "00852" area code
 High temperature approval
 Ring sound 95 dB dfd in 1 m and 10 ringing tone melodies selectable
 Listening by loudspeaker: 70dB in 1m
 Phone book memory: 50 address (name & number) programmable
 Stainless steel keypad for dial and manuel
 Magnetic reed hook-switch
 Telephone line powered. No external power or battery required




Certificate

Model:KNEX1
 Ex ib IIB T5 Gb
 EX 11 2D EX tD A21 IP66 T100°C
 HK Koon Technology LTD
 FAYUEN STR.MONG KOK .KL HK
 Emergency Telephone
 2012 s/n.001



DC=66V





Order number: KNEX2



Specification

Unit dimension	227 x 293 x 135mm
Unit Weight	5.8kg
LCD Display:	2 line alphanumerical display ICON or number or letter Up to 4 level back light selectable
Keypad	stainless steel flash mount Waterproof IP66. Ice protection 21 keys with number and ACE letter for program
Handset:	dynamic receiver with inductive coupling for hearing aids Electret type microphone with noise cancelling Stainless steel armoured handset hold over 170kg
Waterproof protection	IP66
Impact protection:	IK09
Call Flash transfer:	max:120ms
Dialling procedure:	DTMF
External function:	external louder speaker additional earpiece headset ringl sounder
operation temperature:	-25℃ to 60℃
Storage temperature:	-30℃ to +70℃

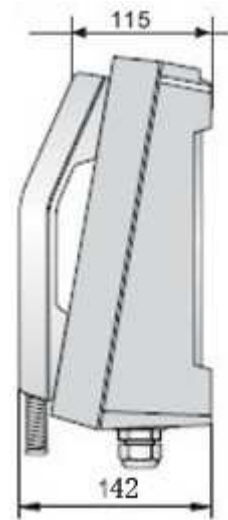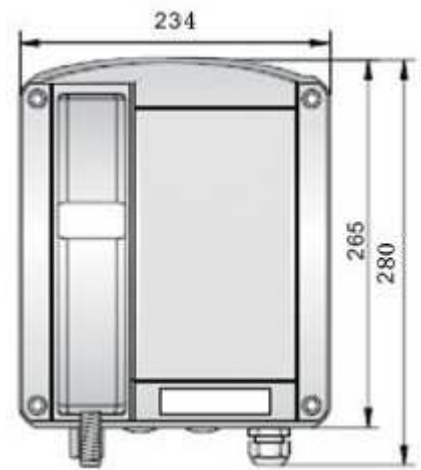

Factory photo



www.koontech.com
www.directindustry.com/tab/koon.html
www.koontech.en.alibaba.com
www.hksosphone.com
 Tel:008675529116366/29116322/27448753 Fax:008675529790278 Email: koon03@vip.163.com or jenny@koontech.com